

## MIG/MAG WELDING

# TMEGA 300

trafimet  
distribution

trafimet  
welding & cutting



3 - 4,6 m  
10' - 15'

0,9 Kg  
1,98 lb

1 m  
3,3'

V  
peak

113

0,8 - 1,2 mm  
.030" - .045"

X  
60% 300A CO<sub>2</sub>  
250A Mix

CODE	↔	Ⓜ
MA5216	3 m / 10'	EURO - TW
MA5217	4 m / 12'	EURO - TW
MA5218	4,6 m / 15'	EURO - TW
MA5213	3 m / 10'	TWECO®
MA5214	4 m / 12'	TWECO®
MA5215	4,6 m / 15'	TWECO®
MA5220M	3 m / 10'	MILLER®
MA5221M	4 m / 12'	MILLER®
MA5222M	4,6 m / 15'	MILLER®
MA5220L	3 m / 10'	LINCOLN®
MA5221L	4 m / 12'	LINCOLN®
MA5222L	4,6 m / 15'	LINCOLN®




CODE	↔	Ⓜ	+	CODE	KIT
MA5220	3 m / 10'	5/8-18 UNF		AR0170	Tweco® 1/4 KIT
MA5221	4 m / 12'	5/8-18 UNF		AR0172	Lincoln® KIT
MA5222	4,6 m / 15'	5/8-18 UNF		AR0173	Miller® KIT
Liner included				Kit to be assembled by a qualified technician	





EN 60974-7





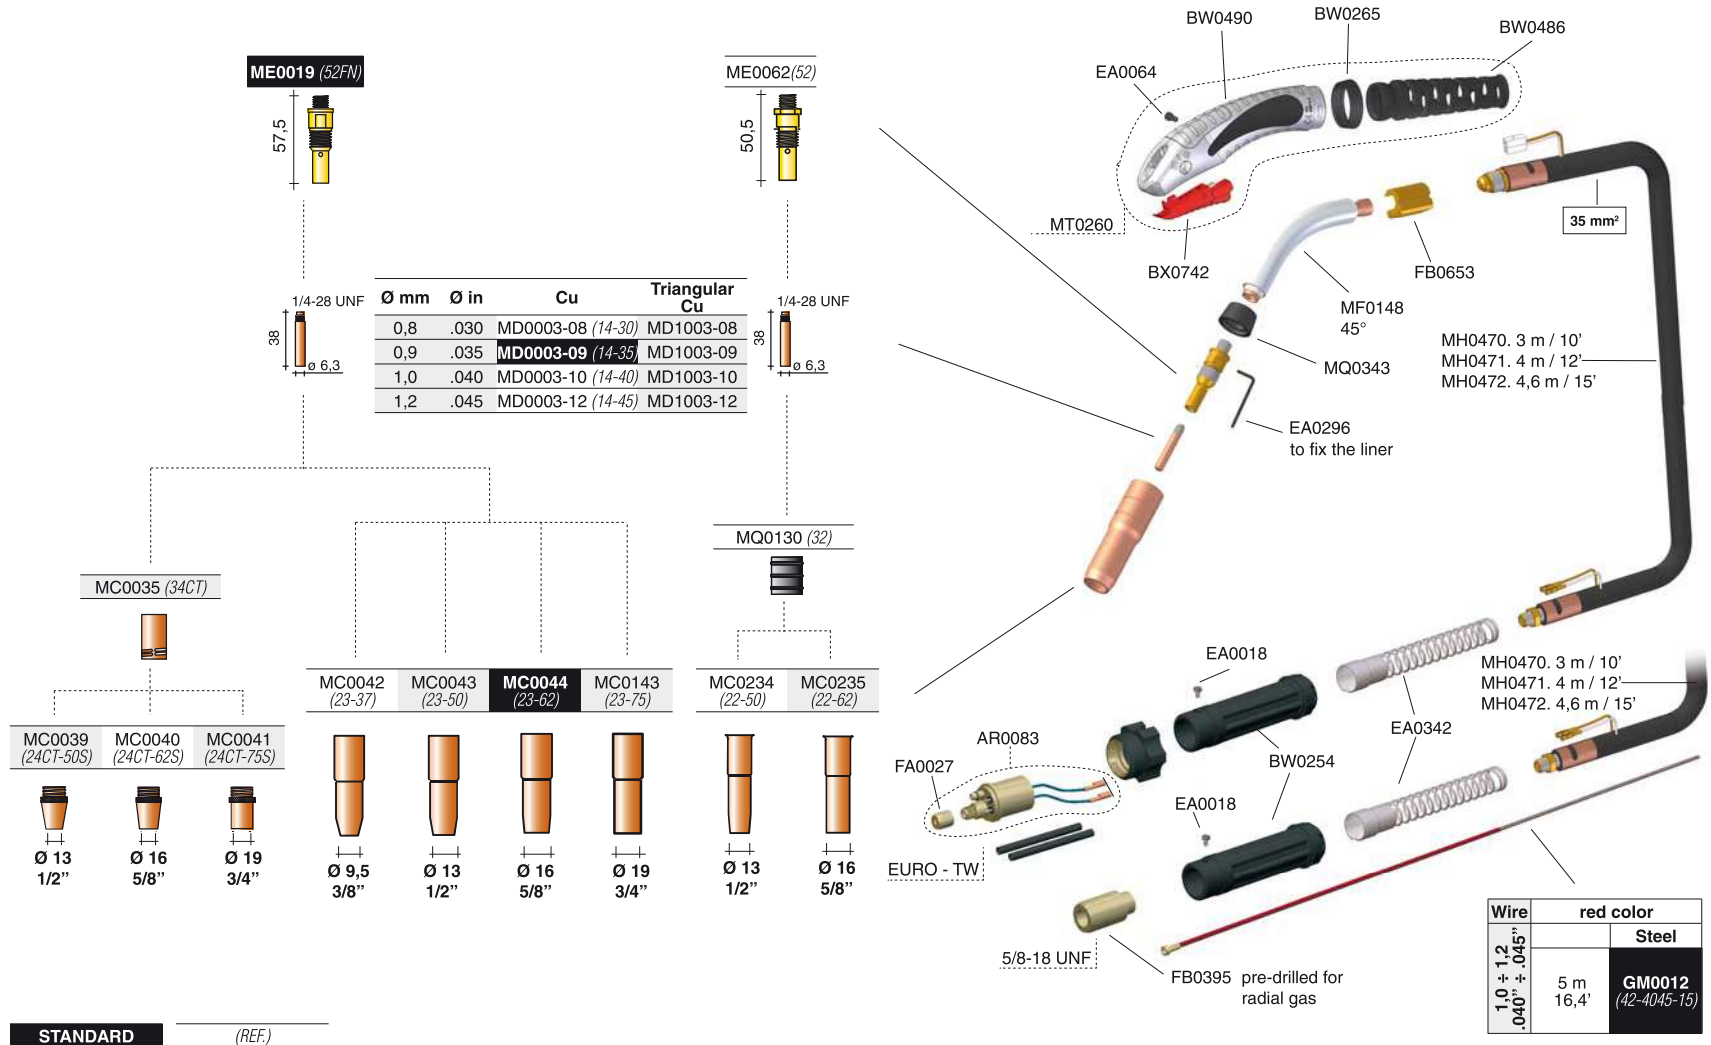

**ME0019 (52FN)**



**ME0062(52)**



Ø mm	Ø in	Cu	Triangular Cu
0,8	.030	MD0003-08 (14-30)	MD1003-08
0,9	.035	<b>MD0003-09 (14-35)</b>	MD1003-09
1,0	.040	MD0003-10 (14-40)	MD1003-10
1,2	.045	MD0003-12 (14-45)	MD1003-12


**MC0035 (34CT)**



**MC0039 (24CT-50S)**   **MC0040 (24CT-62S)**   **MC0041 (24CT-75S)**



**MC0042 (23-37)**   **MC0043 (23-50)**   **MC0044 (23-62)**   **MC0143 (23-75)**   **MC0234 (22-50)**   **MC0235 (22-62)**

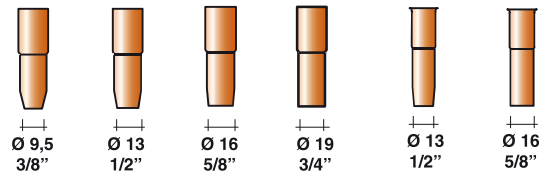

**MQ0130 (32)**



Wire	red color	
		Steel
1,0 + 1,2		
.040" ± .045"	5 m 16,4'	<b>GM0012</b> (42-4045-15)

**STANDARD**      (REF)